#### (19) World Intellectual Property Organization International Bureau



(43) International Publication Date 22 September 2005 (22,09,2005)

# WO 2005/087147 A1

(51) International Patent Classification7: B29C 45/16

A61F 5/00.

(74) Agent: ROLAND, André: c/o ANDRE ROLAND S.A., (CH).

(21) International Application Number:

PCT/IB2005/050822

(22) International Filing Date: 5 March 2005 (05.03.2005)

(25) Filing Language: English (26) Publication Language: English

(30) Priority Data:

PCT/CH2004/000136 8 March 2004 (08.03.2004) CH

(71) Applicant (for all designated States except US): EN-DOART S.A. [CH/CH]; PSE-B P.O. Box 115, CH-1015 Lausanne (CH).

(72) Inventors; and

(75) Inventors/Applicants (for US only): IMBERT, Christian [CH/CH]; c/o ENDOART S.A., PSE-B P.O. Box 115, CH-1015 Lausanne (CH). JORDAN, Alain [CH/CH]; c/o ENDOART S.A., PSE-B P.O. Box 115, CH-1015 Lausanne (CH).


Avenue Tissot 15, P.O. Box 1255, CH-1001 Lausanne (81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FL GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD. MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ. TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SL, SK, TR), OAPI (BF, BJ, CF, CG, CL, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: CLOSURE SYSTEM FOR TUBULAR ORGANS



be closed around a tubular organ towards its two end parts (3/4) by a chosuse system (2/1) to the part (3/1) forming a loop, the first end part (3/1) forming a sleeve having a first (6/1) and second (7/1) open end parts and which is designed to receive the ring second end part (4), the sleeve main axis being defined along a direction which is substantially perpendicular to the main direction of the ring first end part (3), the ring second part (4) furthermore comprising a locking protrusion (2) adapted to hold the sleeve (3) and thereby secure the ring in a closed position, characterized by the fact that the sleeve (3) comprises a hole (5) designed to receive said locking protrusion (2).

# WO 2005/087147 A1



### Published:

- rounsecut:
  with international search report
   with international search report
   before the expiration of the time limit for amending the
   leainst and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginWO 2005/087147 PCT/IB2005/050822

### Closure system for tubular organs

### Field of the invention

The present invention relates to surgical devices for adjusting the diameter of tubular organs such as the esophagus, the stomach, the colon or the urethra. Such devices may be used as sphincters (e.g. anal or urinary sphincter) or for the control of obesity.

It more precisely relates to surgically implantable adjustable rings for encircling said tubular organs.

15

5

#### State of the art

Surgical devices for adjusting the diameter of tubular organs are disclosed in patent documents US 5 658 298, US 5 601 604, FR 2 823 663, WO 01/85071 and WO 03/059215.

The device disclosed in WO 03/059215 has a ring shape which comprises a first and second end parts and which is designed to be closed around a tubular organ towards its two end parts by a closure system to adjust the diameter of said tubular organ by forming a loop, the first end part forming a sleeve having a first and second open end parts and which is designed to receive the ring second appart, the sleeve main axis being defined along a direction which is substantially perpendicular to the main direction of the ring first end part, the ring second part furthermore comprising a locking protrusion adapted to hold the border of the sleeve second end part and thereby to secure the ring in a closed position.

### 30 Summary of the invention

An object of the present invention is to provide an improved closure system for the previous cited prior art devices.

This and other objects are achieved with the device as defined in claim 1.

35

An embodiment of the invention will be discussed in a more detailed way here below together with figures 1 and 2.

5 The adjustable ring 1 comprises a first 3 and a second 4 end parts.

Any suitable material can be used with the ring 1, e.g. a biocompatible elastomeric material. The external part of the ring 1 can be more rigid than the internal part, this later one having an internal diameter which can be adjusted.

The first end part 3 forms a sleeve which is designed to receive the second end 10 part 4.

The second end part 4 has an extension 11 which contains adjusting means, for instance a wire which can be pulled or pushed in order to adjust the ring 1 diameter.

The sleeve 3 has a first end part 6 which is reinforced by a flange 12 and a second end part 7 which contains a hole 5 designed to receive and efficiently retain a protrusion 2 which is fixed to the ring second end part 4.

For closing or opening the ring 1 the sleeve second end part 7 is provided with an extension forming a flexible tab 9.

The tab 9 contains a hole 10 situated close to the sleeve hole 5. The presence of the hole 10 in the tab 9 provides several advantages, in particular by preventing the accidental opening of the closure system when the tab 9 has to support forces which tend to fold the tab 9 in the direction of the extension 11. The forces may be due to the movement of the patient or the organs of the patient or to the fluid or bolus passing through the tubular organ. The zone between both holes 5,10 is reinforced by a flange 8. The other sides of the tab hole 10 are also reinforced by flanges 13,14.

The protrusion 2 shape is designed to closely match the flange 8 shape.

The invention is of course not limited to the above cited example.

For instance, the hole 10 can be replaced by a portion being more flexible than the remaining part of the tab 9.

Such a more flexible portion can be obtained by different ways, for example in making the portion thinner than the tab.

35 The invention can be used for different uses, for instance as a sphincter or as a dastric ring.

5 Claims

1. Surgically implantable adjustable ring (1) comprising a first (3) and second (4) end parts and which is designed to be closed around a tubular organ towards its two end parts (3,4) by a closure system (2,5) to adjust the diameter of said tubular organ by forming a loop, the first end part (3) forming a sleeve having a first (6) and second (7) open end parts and which is designed to receive the ring second end part (4), the sleeve main axis being defined along a direction which is substantially perpendicular to the main direction of the ring first end part (3), the ring second part (4) furthermore comprising a locking protrusion (2) adapted to hold the sleeve (3) and thereby secure the ring in a closed position, characterized by the fact that the sleeve (3) comprises a hole (5) designed to receive said locking protrusion (2).

20

10

15


- Adjustable ring according to claim 1 wherein the sleeve second end part. (7)
  contains said hole (5) and partially covers the ring second end part (4).
- Adjustable ring according to claim 2 comprising a reinforcement (8), for
   instance a flange, situated on at least the hole side which is in close contact with the protrusion (2) when the ring (1) is closed.
  - Adjustable ring according to anyone of the previous claims comprising a tab
     extending from the sleeve second end part (7).


30

Adjustable ring according to claim 4 wherein the tab (9) comprises a flexible
portion, being more flexible than the remaining part of the tab, which is
situated close to said sleeve hole (5), in such a way as to prevent an
accidental opening of the closure system.

35

Adjustable ring according to claim 5 wherein said flexible portion comprises a hole (10).

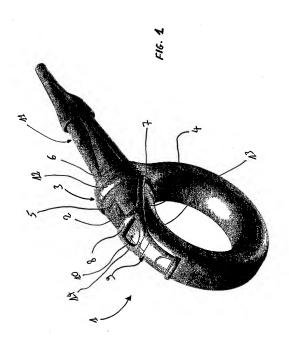

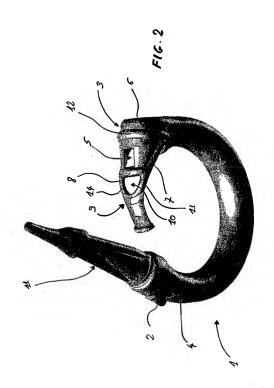

## INTERNATIONAL SEARCH REPORT



		PCT/IB2	2005/050822							
A. CLASSII IPC 7	FICATION OF SUBJECT MATTER A61F5/00 B29C45/16									
According to	international Patent Classification (IPC) or to both national classifica	and IPC								
B. FIELDS SEARCHED										
	cumentation searched (classification system followed by classification A61F B29C	on symbols)								
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched										
Electronic da	ata base consulted during the International search (name of data bas	e and, where practical, eearch terms	used)							
EPO-Internal										
C. DOCUME	ENTS CONSIDERED TO BE RELEVANT									
Cetegory *										
A	WO 02/096326 A (SURGICAL DIFFUSIO MOUTON, DIDIER; I.O.C) 5 December 2002 (2002-12-05) page 7, 1ine 5 - page 8, 1ine 24 figures 2-4		1							
ᆜ	ner documents ere listed in the continuetion of box C.	X Patent femily members are li	sted in annex.							
which is cited to establish the publication date of another citetion or other special reason (as specified) cannot be considered to in comment referring to an oral disclosure, use, exhibition or document is combined with			at with the application but a or theory underlying the or theory underlying the property of the consistency of the property of the property of the property of the property of the property of the property of property o							
4	July 2005	12/07/2005								
Name and n	nailing address of the ISA European Potent Office, P.B. 5818 Patentiaan 2 N.L. – 2280 hV Pijswijk Tel. (431-70) 340-2040, Tx. 31 651 epo nl, Faz (431-70) 340-3016	Authorized officer Storer, J								

### INTERNATIONAL SEARCH REPORT



	Information on patent family members					005/050822
Patent document cited in search report		Publication date	Patent family member(s)		Publication date	
W0 02096326	0 02096326 A		FR AT BR CA CN DE EP ES WO MX	282526 28300 021007 244894 152397 6020206 139910 223275 0209632 PA0301092	8 T 9 A 3 A1 5 A 7 D1 1 A2 8 T3 6 A2 8 A	06-12-2002 15-12-2004 17-08-2004 05-12-2002 25-08-2004 30-12-2004 24-03-2004 01-06-2005 05-12-2002 18-03-2004
			US	200423013	7 A1	18-11-2004

Form PCT/ISA/210 (patent family annex) (January 2004)